

X E85 Nozzles



6-1

ETHANOL FUELING

Automatic shut-off nozzle for full-service and self-service stations.

- Aluminum body, spout, and internal parts are nickel plated to prevent contamination and corrosion from Ethanol blends.
- StreamShaper*® reduces turbulence for straighter fuel flow and less splash back spillage.
- Compatible with unleaded and all Ethanol blends through E100.
- Aluminum reinforced spout bushing keeps the spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Husky X nozzle shuts off when the gas tank is full.
- Nozzle comes with smooth Full Grip Guard.




New Unleaded Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
659404	with Three Notch Hold Open Clip	2.8 (1.2)
659459	with Three Notch Hold Open Clip and Waffle Splash Guard	3.0 (1.2)
659444	with Three Notch Hold Open Clip, Waffle Splash Guard and Flo-Equalizer®	3.0 (1.2)
659454	with Three Notch Hold Open Clip and Flo-Equalizer®	2.8 (1.2)
659495	with Three Notch Hold Open Clip, POPD® S Full Grip Guard, Waffle Splash Guard	3.0 (1.2)
6594100	with Three Notch Hold Open Clip, POPD® S Full Grip Guard, Waffle Splash Guard and Sightglass	3.0 (1.2)

Construction

Body	One Piece Die Cast Aluminum with Electroless Nickel Plating
Seals	Fluorocarbon
Packing	Double O-Ring Seal Protected by Fiber Reinforced Teflon®
Lever	One-Piece Contoured Steel with Hard Plastic Cover.
Inlet	¾" / 19 mm NPT Threads

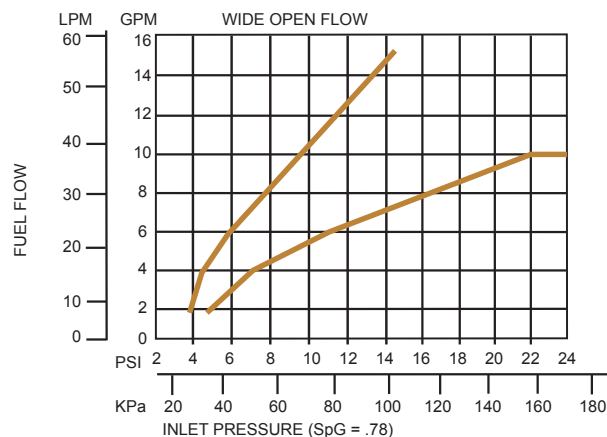

Automatic shut-off nozzle for full-service and self-service stations.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
6360	¾" F x ¾" F Reconnectable E85 Safe-T-Break®
6273	¾" F x ¾" F Non-Reconnectable E85 Safe-T-Break®

Swivels

MODEL NO.	DESCRIPTION
6350	¾" M x ¾" F Multi-Plane E85 Swivel

Spouts

MODEL NO.	DESCRIPTION
6207	Unleaded E85 Spout without Flo-Stop®

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
4620	2" Slip-On Pressure Vacuum Vent
4885	2" Thread-On Pressure Vacuum Vent - NPT
5885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing and Maintenance

MODEL NO.	DESCRIPTION
7089	Nozzle Service Kit
3593	Hold Open Clip Kit
0397	Unleaded Spout Gauge
7490	Internal Flo-Equalizer® - 10 gpm/37.9 Lpm

Guards

MODEL NO.	DESCRIPTION
3376	Black Handle Guard
4145	Full Grip Guard
1806	Full Grip Reguard
5494	Lever Guard
3795	Mate Guard
3440	Mate Easy-on Package
6628	POPD® Clear Cover
6665	POPD® Full Grip Guard
7205	POPD® Full Grip Reguard
7815	POPD® Mate Guard
1506	Protection Package
1809	Reguard Protection Package
1808	Waffle Splash Guard

