



Pressure activated, automatic shut-off nozzle for full-service, self-service and unattended stations.

- XS® E85 nozzle shuts off when:
 - the pump shuts off
 - the gas tank is full
 - the lever is opened before the pump is turned on
 - the leak detector has not completed the test cycle
- Aluminum body, spout, and internal parts are nickel plated to prevent contamination and corrosion from Ethanol blends.
- Contains a poppet disc seal rated at -40°F/C to prevent fuel leakage from the main seal in extreme cold weather.
- StreamShaper® reduces turbulence for straighter fuel flow and less splash back spillage.
- Compatible with unleaded and all Ethanol blends through E100.
- Aluminum reinforced spout bushing keeps the spout tip round and acts as a captive fastener to prevent tip-end sensor damage.
- Nozzle is equipped with a unique Flo-Stop® device that shuts off the nozzle if it falls from the fill tank or raises above the horizontal.
- Nozzle comes with smooth Full Grip Guard.




New Unleaded Nozzles

MODEL NO.	DESCRIPTION	SHIPPING WEIGHT LBS (KG)
666104	with Three Notch Hold Open Clip	2.6 (1.1)
666164	with Three Notch Hold Open Clip and Waffle Splash Guard	2.9 (1.3)
666154	with Three Notch Hold Open Clip and Flo-Equalizer®	2.6 (1.1)
666144	with Three Notch Hold Open Clip, Waffle Splash Guard and Flo-Equalizer®	2.9 (1.3)

Construction

Body	One Piece Die Cast Aluminum
Seals	Fluorocarbon
Packing	Double O-Ring Seal Protected by Fiber Reinforced Teflon®
Lever	One-Piece Contoured Steel
Inlet	¾" / 19 mm NPT Threads

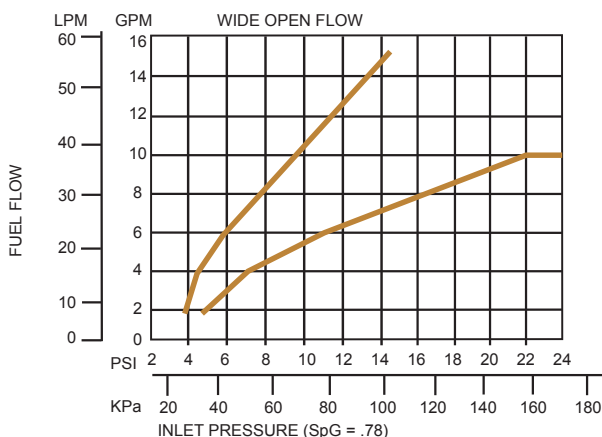



XS® E85 CW Nozzles

Pressure activated, automatic shut-off nozzle for full-service, self-service and unattended stations.

Dimensions and System Options

Safe-T-Breaks®

MODEL NO.	DESCRIPTION
6360	¾" F x ¾" F Reconnectable E85 Safe-T-Break®
6273	¾" F x ¾" F Non-Reconnectable E85 Safe-T-Break®

Swivels

MODEL NO.	DESCRIPTION
6350	¾" M x ¾" F Multi-Plane E85 Swivel

Spouts

MODEL NO.	DESCRIPTION
6207	Unleaded E85 Spout without Flo-Stop®

Pressure/Vacuum Vents

MODEL NO.	DESCRIPTION
4620	2" Slip-On Pressure Vacuum Vent
4885	2" Thread-On Pressure Vacuum Vent - NPT
5885	2" Thread-On Pressure Vacuum Vent with Internal Screen - NPT

Accessories, Testing, and Maintenance

MODEL NO.	DESCRIPTION
7089	Nozzle Service Kit
3593	Hold Open Clip Kit
0397	Unleaded Spout Gauge
7490	Internal Flo-Equalizer® - 10 gpm/37.9 Lpm

Guards

MODEL NO.	DESCRIPTION
3376	Black Handle Guard
4145	Full Grip Guard
1806	Full Grip Reguard
5494	Lever Guard
3795	Mate Guard
3440	Mate Easy-on Package
6628	POPD® Clear Cover
6665	POPD® Full Grip Guard
7205	POPD® Full Grip Reguard
7815	POPD® Mate Guard
1506	Protection Package
1809	Reguard Protection Package
1808	Waffle Splash Guard



2325 Husky Way • Pacific, MO 63069
 (800) 325-3558 • Fax (636) 825-7300
www.husky.com • sales@husky.com

MADE IN THE U.S.A. 