

# BFH2 Fluid Handle

**Balcrank**  
Fluid Dispensing Systems

A delivery control handle with a polypropylene body and stainless steel valve mechanism.

- High chemical compatibility
- Easy flanged meter connection
- Improved ergonomic design
- Increased security



## Fluids

- AdBlue
- Windshield washer fluid
- Antifreeze
- Distilled water
- Glycol
- Brake fluid

## Applications

- Truck dealerships
- Fleet service
- Mining and construction
- Railroad and mass transit vehicles
- Lube trucks

3320-057

3330-217

3330-218



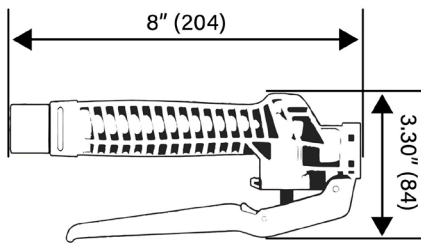
## ORDER INFORMATION



MODELS AVAILABLE	DESCRIPTION
<b>3320-057</b>	Fluid handle, 1/2" SS rigid outlet, no tip
<b>3320-058</b>	Fluid handle, 1/2" PA flexible outlet, no tip
<b>3320-059</b>	Fluid handle, stainless steel and flex 90° 1/4 turn not for DEF
<b>3330-216</b>	Metered fluid handle, 1/2" SS rigid outlet no tip
<b>3330-217</b>	Metered fluid handle, 1/2" PA flexible outlet, no tip
<b>3330-218</b>	Metered fluid handle, stainless steel and flex 90° 1/4 turn not for DEF

## TECHNICAL DATA

SPECIFICATIONS	FLUID HANDLE	METERED FLUID HANDLE
Units of measure	-	Liters, gallons, quarts, pints
Accuracy	-	± 0,5 %
Flow rate	8 gal/min (30 l/min)	8 gal/min (30 l/min)
Maximum pressure	725 psi (50 bar)	435 psi (30 bar)
Swivel inlet	1/2" NPT (F)	1/2" NPT (F)
Operating temperature	14 °F to 122 °F (-10 °C to 50 °C)	14 °F to 122 °F (-10 °C to 50 °C)
Battery	-	2 x "AAA" alkaline
Weight (with no outlet)	0.63 lb (284 kg)	1.81 lb (819 kg)
Compatible Fluids		DEF, windshield wash solutions, glycol, anti-freeze
Wetted materials	PP, Acetal, Stainless steel, PA, Viton®	Stainless steel, PVC, LCP, Viton®, PP, acetal, PA
Pulses per liter	-	160
Maximum/minimum recorded dispense	-	0,01 to 99999 for liters, gallons and quarter units 0,02 to 99999 for pint units
Service Bulletin	SB 3001	SB 3001 & SB 3095

### Dimensions inches (mm)



MODELS AVAILABLE	DESCRIPTION	EXTENSIONS
<b>3332-111</b>	1/2" SS rigid outlet no tip	
<b>3332-112</b>	1/2" PA flexible outlet, no tip	
<b>3332-113</b>	Stainless steel and flex 90° 1/4 turn not for DEF	