


ERGO™ 75



DESIGNED FOR COMFORT. ENGINEERED FOR PERFORMANCE.

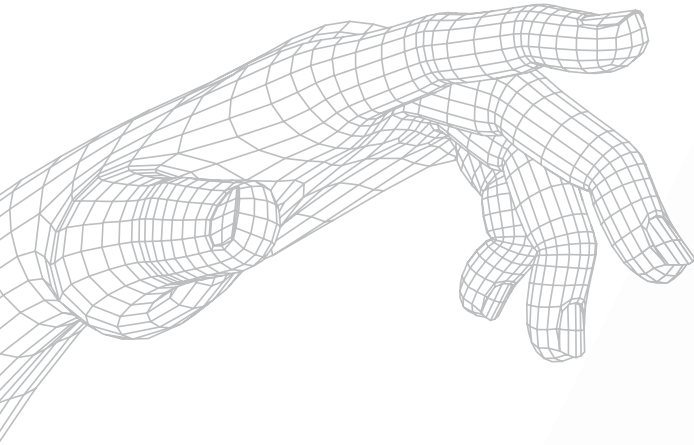


Performance in Hand.

We set out to completely reinvent the dispenser nozzle and found our inspiration in nature's perfect design – the human hand. The result is the Catlow Ergo™ 75 family of nozzles.

The Ergo™ 75 nozzle is sleek, streamlined and comfortable – it's the lightest nozzle ever designed. Purpose-built for easy one-handed operation. Built with stronger materials, tested for 3 million test cycles and offered with an industry-leading 24-month warranty.

Ergo family of nozzles support all your fueling needs, including Ethanol blends (up to E25 and E85), Biodiesel blends (up to B10 and B20) and DEF/AdBlue.

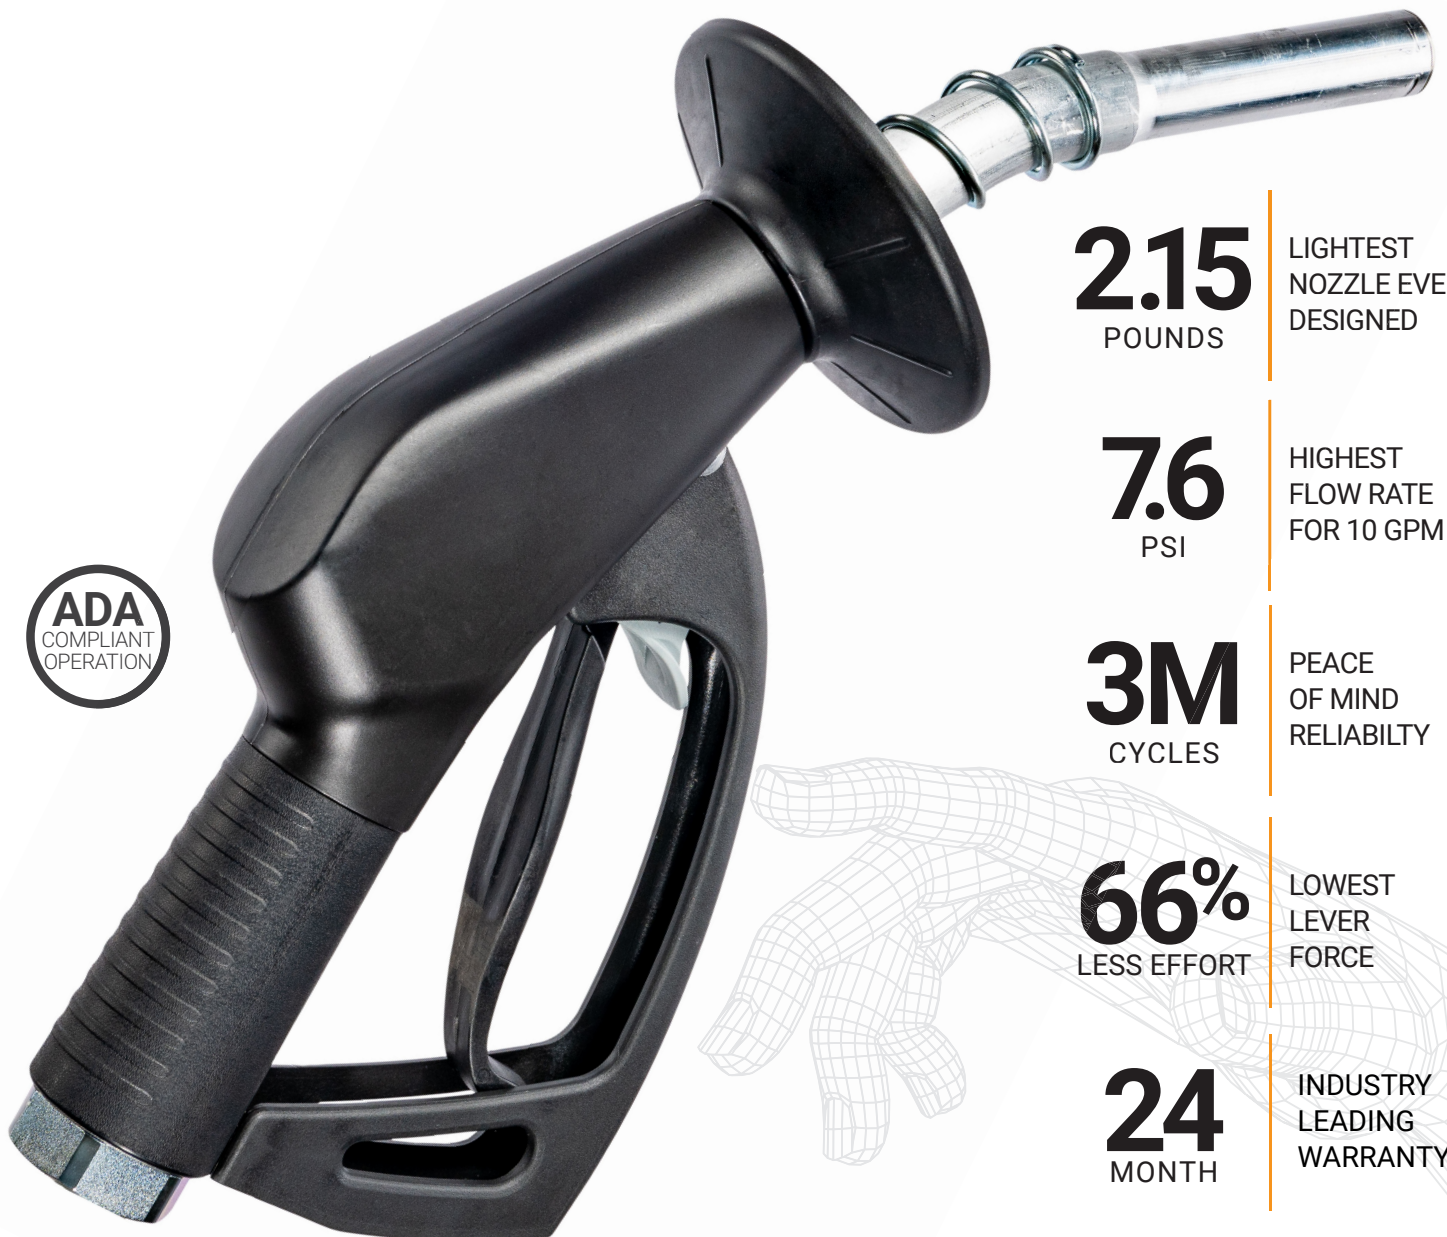

2.15
POUNDS

LIGHTEST
NOZZLE EVER
DESIGNED

7.6
PSI

HIGHEST
FLOW RATE
FOR 10 GPM

3M
CYCLES


PEACE
OF MIND
RELIABILITY

66%
LESS EFFORT

LOWEST
LEVER
FORCE

24
MONTH


INDUSTRY
LEADING
WARRANTY

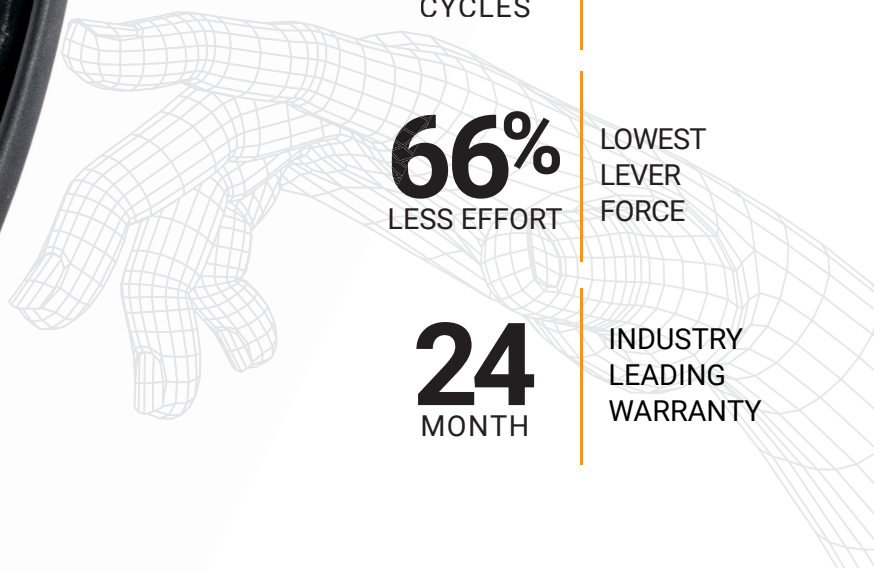

ERGO™ 75

DESIGNED FOR COMFORT. ENGINEERED FOR PERFORMANCE.

TECHNICAL DATA

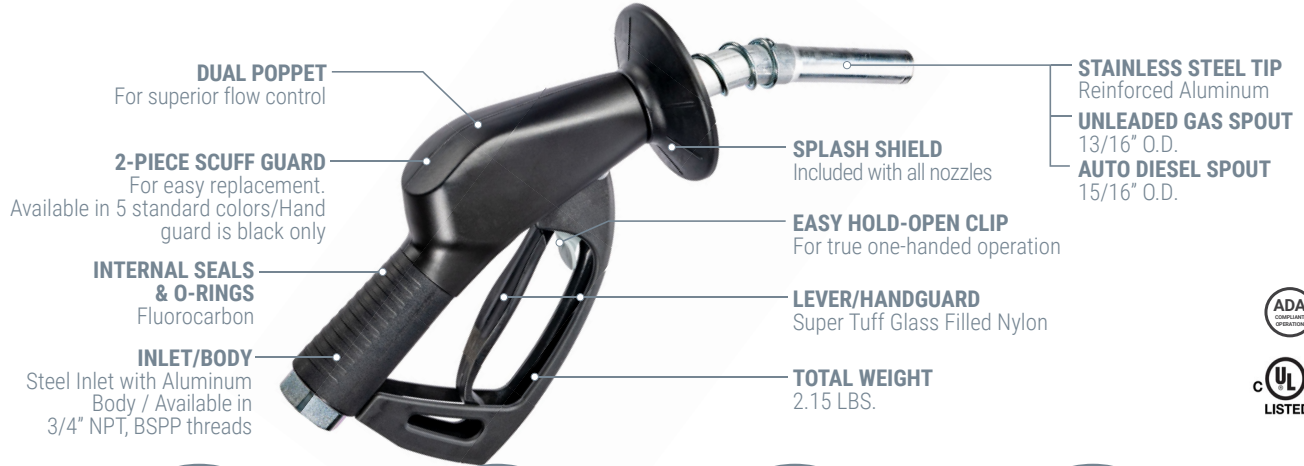

Breakthrough Engineering
Completely redesigned using the most modern technology

Highest Flow Rate
Increased throughput during peak periods

Increased Durability
Stronger metals and extreme temperature ready

Easiest Nozzle to Use
Designed for true one-handoperation



SPOUT MODELS

- ER75AGA2 | UNLEADED SPOUT | *Up to 10% Ethanol Compatible*

- ER75E25A2 | UNLEADED SPOUT | *Up to E25 Compatible*

- ER75E85A2 | UNLEADED SPOUT | *Up to E85 Compatible*

- ER75ADA2 | LEADED SPOUT FOR AUTO DIESEL


- ER75B20A2 | DIESEL SPOUT | *Up to B20 Compatible*

- ER75DXX02 | DIESEL EXHAUST FLUID SPOUT | *DEF/AdBlue*

Features & Benefits

- Certified UL/ULC 2586 listed for gasoline, diesel and ethanol blends up to E85 and Biodiesel blends up to B20 to cover all fueling needs
- Unique attitude device (AD) provides automatic safety shut-off if spout is raised above horizontal or if the nozzle falls from the vehicle
- Reinforced stainless steel spout tip and vac-port sensing tip to increase durability and nozzle life
- Climate ready for extreme temperatures (-40°F to 125°F)
- Dual poppet for superior flow control to easily regulate low-flow and accurate fuel dispensing
- Easy one-motion hold-open clip for a true one-handed operation by any user
- 2-piece scuff guard provides impact protection and easy in-field replacement
- Complimentary splash shield included with all nozzles
- Design working pressure: 50 PSI (3.45 bar) maximum pressure
- Available in NPT and BSPP threads
- Customer friendly and meets ADA requirements with 66% less force required to start the flow of fuel

PRESSURE DROP vs. FLOW RATE*

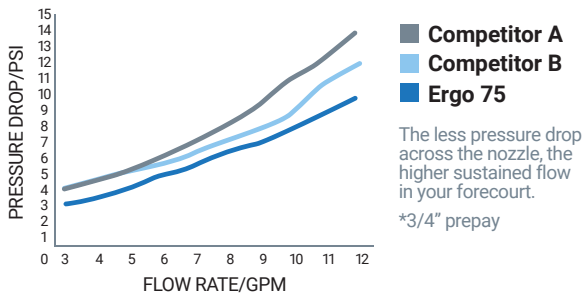

ACCESSORIES

Breakaways 	CTM75 3/4" CAM TWIST Magnetic Breakaway	Replacement Spouts 	CLS-AD Auto Diesel Spout with Attitude Device
	Swivels 		C720 3/4 3/4"M x 3/4"F Twister Swivel C720 compatible with all fuel blends up to E85 & B20
	ILS IN-LINE SWIVEL Compatible with 3/4" nozzles and hoses. UL Certified for gas, diesel B20, E25 and E85	Scuff Guards & Splash Shields Available Pantone® Colors:	000-00-0 Placeholder for BioDiesel Spout
		RED- 200 C BLUE- 286 C BLACK- BLACK C YELLOW- 128 C GREEN- 348 C ORANGE- 144 C	

*Other colors available upon request with minimum quantities

