


Pleated Paper Cartridge
 Part Number: PL718-5FPB
 Micron Rating: 5 Micron nominal
 Support structure: Plated Steel
 Media: Cellulose
 Gasket: Buna-N
 Max Temp: -20°F to +250°F
 Replacement Differential Pressure: 25 PSID (172 KPa)
 Element Collapse Pressure: 70 PSID (482 KPa)
 Direction of flow: Outside → In

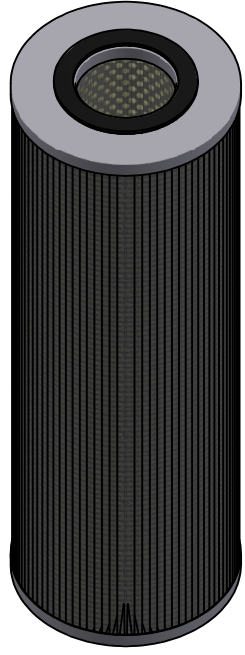

Property of FAA Filters LLC
 200 Westshore Blvd., Newark, New York 14513
 Telephone 800-265-8943 Fax 315-331-4750
 This print is provided on a restricted basis. It is not to be used in any way detrimental to the interest of FAA Filters LLC.
 Confidential document, Duplication prohibited

FAA Filters LLC reserves the right to change design and/or specifications without notice

Refilco Cartridges

Pleated Paper Cartridge

| | | | | | | | | | | | |
|--|-----|---|---------------|--|------------|----------------|-------------------|--------------|----------------|----------|----------|
| ORIGINAL ISSUE | | Refilco Cartridges Pleated Paper Cartridge | | | | DRAWING NUMBER | | DRAWING TYPE | | REVISION | |
| DRAWN: | reh | | | | | 11/22/2017 | PL718-5FPB | | GA | | ~ |
| CHECKED: | reh | | | | | 9/26/2023 | SHEET SIZE | | NUMBER | | SCALE |
| APPROVED: | reh | 9/26/2023 | A | | 1 OF 1 | | NOTED | | Released | | |
| UNLESS OTHERWISE NOTED BREAK EDGES/REMOVE BURRS UNITS: LINEAR INCHES; ANGULAR DEGREES GENERAL TOLERANCES: ± | | | FRACTIONAL: ~ | | DECIMAL: ~ | | ANGULAR: ~ | | REFERENCE: (X) | | |

2

1