

3A FOOD & BEVERAGE

HIGH-PRECISION TURBINE METER



3A Turbine Meter
with 2-Wire or
3-Wire Magnetic
Pickup Options

3A Turbine Meter
with RT14 Display

The GSCPS Series High Precision Meter is the most accurate of all FLOMEC® Turbine Meters. This meter was designed to meet the strict 3-A Sanitary Standards for any food and beverage application.

The GSCPS turbine meter's robust design provides reliable performance while delivering economical operating costs. The internals of the A-3 meter are machined and polished to meet 3A self-draining and cleaning requirements (Ra 32). Parts are easily replaceable making lifetime maintenance of the turbine meter a preferred choice.

FEATURES / BENEFITS

- Proven turbine design that provides the best total operating cost
- Meets Clean in Place (CIP), Steam in Place (SIP), and Clean Out of Place (COP) requirements to allow for any sanitary procedure that work best for plant managers
- +/- 0.5% accuracy of reading and +/- 0.1% repeatability providing reliable, accurate flow measurement
- Multiple blind pulse out options available for connection to a variety of PLC, display equipment, and process control equipment
- Factory installed local Rate and Totalizer display available with digital, analog and flow alarm outputs
- Wide temperature range of -100° F to 225° F (-74° C to 107° C) to accommodate various stages of food and beverage processes
- Capable of 285° F (140° C) temperature up to 1 hour for SIP sanitary procedures

SPECIFICATIONS


Design Type:	Turbine		
Fitting Type:	Sanitary Clamp		
Housing Material:	316 Stainless Steel		
Meter ID:	1" --> 1-1/2" Fitting		
	1-1/2" --> 1-1/2" Fitting		
	2" --> 2" Fitting		
Flow Range:	1" (100)	6.7 - 67 GPM	(25 - 252 L/min)
	1-1/2"(150)	17.7 - 177 GPM	(67 - 670 L/min)
	2" (200)	33 - 330 GPM	(125 - 1250 L/min)
Accuracy (Linearity):	± 0.5%		
Repeatability:	± 0.1%		
Pressure Rating:	Limited by fitting size, clamp size and temperature.		
Temperature Range:			
Operating:	-100° F to 225° F (-74° C to 107° C)		
For SIP (up to 1 hour):	285° F (140° C)		
Typical K-Factor:	1" (100)	896 PPG (237 Pulses/L)	
	1-1/2"(150)	340 PPG (90 Pulses/L)	
	2" (200)	181 PPG (48 Pulses/L)	
Wetted Materials:	Housing:	316 Stainless Steel	
	Bushings & Bearings:	PEEK	
	Shaft:	316 Stainless Steel	
	Rotor:	CD4MCu Stainless Steel	
	Rotor Supports:	316 Stainless Steel	
	Retaining Rings:	300 Series Stainless Steel	

Recommended Strainer Size:	1"	40 mesh (420 µm)
	1-1/2"	18 mesh (1000 µm)
	2"	14 mesh (1410 µm)
Frequency Output:	1" (100)	100 - 1000 Hz
	1-1/2"(150)	100 - 1000 Hz
	2" (200)	100 - 1000 Hz
Calibration Report:	Comes standard.	
	N.I.S.T. – Certification available.	

FLUIDS

- Alcohols
- Milk
- Water
- Beer
- Filtered Wine
- De-ionized Water
- Vinegar
- Light Oils
- Juice
- CIP Solution

APPROVALS/WARRANTY



Sanitary Rating.
Number 28-04.

This meter meets the strict 3-A Sanitary Standards using the new "Third Party Verification" (TPV) program. Our methods of design, construction and traceability of components have been reviewed and approved.



Wichita · Sydney

GREAT PLAINS INDUSTRIES

MODELS

3A Meter, RT14 4-20mA, Scaled Pulse, Pulse out Rate and Totalizer Display

G-100-3A-R	GSCPS-100-RT14	RT14 Display, Sanitary Turbine HT 1" (025mm), 1-1/2" Tri-Clamp (with 3A Certification) (Default to Gallons)
G-150-3A-R	GSCPS-150-RT14	RT14 Display, Sanitary Turbine HT 1-1/2" (040mm), 1-1/2" Tri-Clamp (with 3A Certification) (Default to Gallons)
G-200-3A-R	GSCPS-200-RT14	RT14 Display, Sanitary Turbine HT 2" (050mm), 2" Tri-Clamp (with 3A Certification) (Default to Gallons)

3A Meter, 2-Wire Magnetic Pickup with 10ft. of Cable (Sine Wave Pulse)

G-100-3A-2	GSCPS-100-2	2-wire Magnetic Pickup, Sanitary Turbine HT 1" (025mm), 1-1/2" Tri-Clamp (with 3A Certification)
G-150-3A-2	GSCPS-150-2	2-wire Magnetic Pickup, Sanitary Turbine HT 1-1/2" (040mm), 1-1/2" Tri-Clamp (with 3A Certification)
G-200-3A-2	GSCPS-200-2	2-wire Magnetic Pickup, Sanitary Turbine HT 2" (050mm), 2" Tri-Clamp (with 3A Certification)

3A Meter, 3-Wire Magnetic Pickup with 10ft. of Cable (Square Wave Pulse)

G-100-3A-3	GSCPS-100-3	3-wire Magnetic Pickup, Sanitary Turbine HT 1" (025mm), 1-1/2" Tri-Clamp (with 3A Certification)
G-150-3A-3	GSCPS-150-3	3-wire Magnetic Pickup, Sanitary Turbine HT 1-1/2" (040mm), 1-1/2" Tri-Clamp (with 3A Certification)
G-200-3A-3	GSCPS-200-3	3-wire Magnetic Pickup, Sanitary Turbine HT 2" (050mm), 2" Tri-Clamp (with 3A Certification)

ACCESSORIES / ELECTRONICS

Part No.	Description
80001101*	Weather proof enclosure - Zinc
80001105*	Weather proof enclosure - SS
RT406D0FM†	Rate/ Totalizer with Pulse Out (Remote)
RT142D0FM	Rate/Totalizer, 4-20 mA, Pulse, Alarms (remote)
EB112D0FM†	Batch Controller (Remote)

*This enclosure is not approved for 3A applications.

†This display is not approved for 3A applications.



John M. Ellsworth Co., Inc.


P.O. Box 240072
8700 West Bradley Road
Milwaukee, WI 53224

800-333-3331 PHONE
info@jmesales.com E-MAIL
www.jmesales.com WEB

DIMENSIONS

3A Turbine Meter with RT14 Display

Size	Height	Length	Width
GSCPS-100-RT14	6.74 in.	3.562 in.	4.71 in.
GSCPS-150-RT14	6.95 in.	4.594 in.	4.87 in.
GSCPS-200-RT14	3.25 in.	6.063 in.	5.15 in.

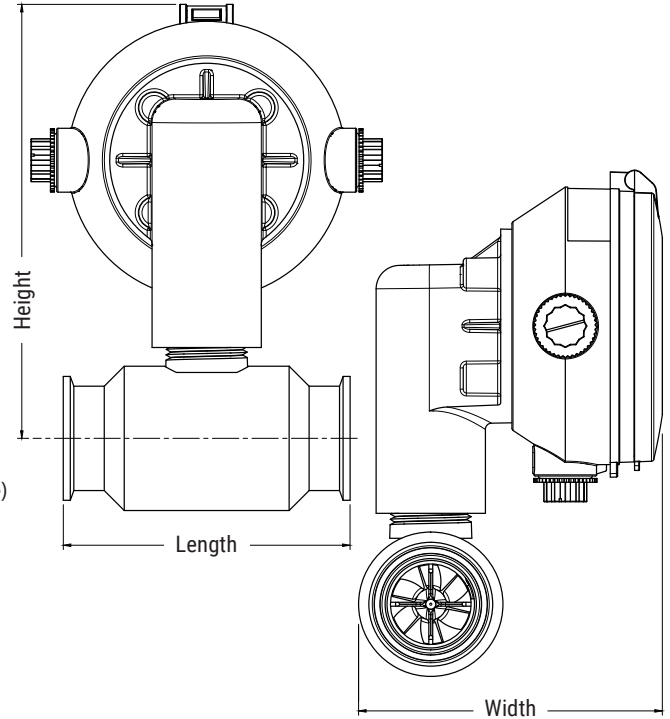

DIMENSIONS

3A Turbine Meter with 2-Wire or 3-Wire Magnetic Pickup Options

Size	Height	Length	Width
GSCPS-100-2	2.38 in.	3.562 in.	2 in.
GSCPS-100-3	2.98 in.	3.562 in.	2 in.
GSCPS-150-2	2.62 in.	4.594 in.	2.3 in.
GSCPS-150-3	3.22 in.	4.594 in.	2.3 in.
GSCPS-200-2	2.86 in.	6.063 in.	2.88 in.
GSCPS-200-3	3.46 in.	6.063 in.	2.88 in.

