## Turbine Series - 900FH/1000FH

## **FUEL**

### Specifications:

Height: 900FH: 16.5" (41.9 cm)

1000FH: 21.8" (55.4 cm)

Width: 5.96" (15.1 cm) 5.96" (15.1 cm) Depth:

with Bracket 6.32" (16.1 cm)

Weight: 900FH: 6.0 lbs (2.7 kg)

1000FH: 10 lbs (4.5 kg)

7/8"-14 UNF-2B (SAE J1926) Ports:

Service Clearance (Top): 900FH: 5.0" (12.7 cm)

1000FH: 10.0" (25.4 cm)

Vacuum Installation Recommended Maximum Pressure: 15 psi (1.03 bar)

Max Flow Rate: 900FH: 90 gph (341 lph)

1000FH: 180 gph (681 lph)

#### Create a Part Number


Turbine Model


180 GPH Flow Rate **Housing Type** Turbine Model 90 GPH Flow Rate 900FH 1000FH

| Heater Option | 12 VDC Heater (325 watt) | 24 VDC Heater (325 watt) |
|---------------|--------------------------|--------------------------|
|               | 312                      | 324                      |


| Filtration Kating | 2 micron | 10 micron | 30 micron |
|-------------------|----------|-----------|-----------|
|                   | 2        | 10        | 30        |
|                   |          |           |           |


### Dimensions:





| ASSEMBLY    | DESCRIPTION  |
|-------------|--|
| 900FH2      | 900 Turbine Assy., 2 micron Filter                 |
| 900FH10     | 900 Turbine Assy., 10 micron Filter                |
| 900FH30     | 900 Turbine Assy., 30 micron Filter                |
| 900FH31230  | 900 Turbine Assy., 12VDC Heater, 30 micron Filter  |
| 900FH32430  | 900 Turbine Assy., 24VDC Heater, 30 micron Filter  |
| 1000FH2     | 1000 Turbine Assy., 2 micron Filter                |
| 1000FH10    | 1000 Turbine Assy., 10 micron Filter               |
| 1000FH30    | 1000 Turbine Assy., 30 micron Filter               |
| 1000FH3122  | 1000 Turbine Assy., 12VDC Heater, 2 micron Filter  |
| 1000FH31210 | 1000 Turbine Assy., 12VDC Heater, 10 micron Filter |
| 1000FH31230 | 1000 Turbine Assy., 12VDC Heater, 30 micron Filter |
| 1000FH3242  | 1000 Turbine Assy., 24VDC Heater, 2 micron Filter  |
| 1000FH32430 | 1000 Turbine Assy., 24VDC Heater, 30 micron Filter |
|             |  |
|             |  |



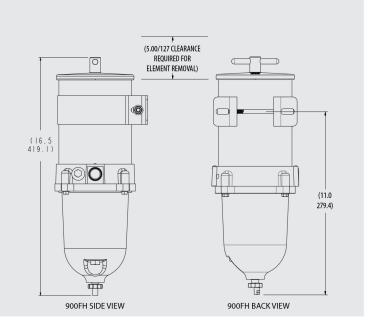



▲WARNING: The products described in this literature can expose you to chemicals including Diisononyl phthalate, Carbon black extract, which are known to the State of California to cause cancer. For more information go to www.P65Warnings.ca.gov.

# **PARTS**

# **Turbine** - 900FH/1000FH

| 1 |                     | 1A<br>1B                         |
|---|---------------------|----------------------------------|
| 2 |                     | 2A<br>2B                         |
| 3 |                     | 3A<br>3B                         |
| 4 |                     | 4A<br>4B                         |
| 5 |                     | 5A<br>5B<br>5C<br>5D<br>5E<br>5F |
| 6 |                     | 6A<br>6B                         |
| 7 |                     | 7A<br>7B<br>7C<br>7D<br>7E       |
| 8 | <u>l</u> <u>l</u> • | 8A<br>8B                         |

|    | Part #                           | Description  |  |
|----|----------------------------------|--|--|
| 1A | RK23183<br>RK19671               | T-handle Kit - <i>Includes 1B &amp; 2B Optional</i> - Stainless Steel T-handle Vacuum Gauge  |  |
| 1B |                                  | T-handle 0-ring - <i>Included in 9A</i>  |  |
| 2A | RK 11-1927-01                    | 900FH/1000FH Lid Kit - <i>Includes 1B &amp; 2B</i>   |  |
| 2B |                                  | Lid Gasket - <i>Included in 9A</i>   |  |
| ЗА | 2040N-02<br>2040N-10<br>2040N-30 | 900FH Replacement Element 2 micron - <i>Includes 1B &amp; 2B</i> 900FH Replacement Element 10 micron - <i>Includes 1B &amp; 2B</i> 900FH Replacement Element 30 micron - <i>Includes 1B &amp; 2B</i>         |  |
| 3B | 2020N-02<br>2020N-10<br>2020N-30 | 1000FH Replacement Element 2 micron - <i>Includes 1B &amp; 2B</i> 1000FH Replacement Element 10 micron - <i>Includes 1B &amp; 2B</i> 1000FH Replacement Element 30 micron - <i>Includes 1B &amp; 2B</i>      |  |
| 4A | RK11-2016<br>RK11-2015           | Heater Kit - 12 vdc, 325 watt - <i>Includes 1B, 2B &amp; 4B</i> Recommended RK 11861 Heater Relay Kit  Heater Kit - 24 vdc, 325 watt - <i>Includes 1B, 2B &amp; 4B</i> Recommended RK 11862 Heater Relay Kit |  |
| 4B |                                  | 3-wire Heater Feed-thru - <i>Included in 4A</i>  |  |
| 5A | RK11-2009                        | 900FH Body/Housing/Return Tube - Includes 2B, 7A & 8B  |  |
| 5B | RK11-2005                        | Bracket Kit - Includes Bolt, Washer, and Nut   |  |
| 5C | RK11-2010                        | 1000FH Body/Housing/Return Tube - Includes 2B, 7A & 8B   |  |
| 5D | RK 11838                         | Carriage Bolt Kit - Includes (2) Bolt, (2) Washer, and (2) Nuts  |  |
| 5E |                                  | Heater Feed-thru or Plug 0-ring - Included in 9A   |  |
| 5F | RK 11-1679                       | Feed-thru Plug - <i>Includes 5E</i>  |  |
| 6A | RK 11028B                        | Checkball and Gasket Kit - <i>Included in 9A</i>   |  |
| 6B | RK 11-1939                       | Centrifuge and Baffle Kit - Includes 6A & 7A   |  |
| 7A |                                  | Bowl Gasket - <i>Included in 9A</i>  |  |
| 7B | RK 11-1938                       | Bowl Kit - Includes 7A, 7C & 7E  |  |
| 7C | RK 20126                         | Bowl Plug (O-ring Included in 9A)  |  |
| 7D | RK33802                          | WIF Probe Kit - 1/2"-20 UNF - Two Wire Pigtail<br>Water Detection Module Required - <i>Use 9C</i>  |  |
| 7E |                                  | Self-venting Drain (Gasket Included in 9A)   |  |
| 8A | RK 11037A                        | Bowl Ring Kit (FH - Tan) - <i>Includes 7A &amp; 8B</i>   |  |
| 8B | RK 11542                         | Cap Screw Bowl Fasteners (set of 4)  |  |
|    |                                  |  |  |

#### Accessories and Parts Available - Not Shown

| 9 <b>A</b> | RK 11-1952           | Complete Seal Service Kit - 900FH/1000FH Series Filters   |
|------------|----------------------|---|
| 9B         | RK19669              | Vacuum Gauge (30" Hg) - 3 needles: Theshold (red),<br>Max Change Out (Red - Adjustable), Gauge (Black)              |
|            | RK19667              | Compound Gauge - pressure (15 PSI) and vacuum (30" Hg)  |
| 9C         | RK 14329<br>RK 14321 | Water Detection Module - 12 vdc<br>Water Detection Module - 24 vdc  |
| 9 <b>D</b> | RK30880E             | WIF Sensor/Detection Kit - 1/2"-20 UNF  |
| 9E         | RK11-1978            | Checkball Spring Kit  |
| 9F         | RKP1912<br>RKP1924   | Primer Pump Kit - 12 vdc - Adds 3.25" (8.26 cm) to Height Primer Pump Kit - 24 vdc - Adds 3.25" (8.26 cm) to Height |